

HELLA
VALUEFIT



BLADE DRIVING LIGHTS



www.hella.com/lightstyle

**YOUR
STYLE...**

...IS A STATEMENT



DEFINE YOURSELF:



Define your unique style with the HELLA VALUEFIT Blade range of performance driving lights, featuring the signature Blade position light, tailored to your choice of white or amber.

Customise your vehicle with slim profile 7" and 9" round, or 9" rectangular designs, with chrome or black rim options.

On road or off-road, make your vehicle as unique as you are.



ON ROAD




DRIVING LIGHT



POSITION LIGHT



DRIVING LIGHT



POSITION LIGHT

OFF-ROAD ONLY




DRIVING LIGHT



POSITION LIGHT




DRIVING LIGHT



POSITION LIGHT


THE CHOICE IS YOURS...

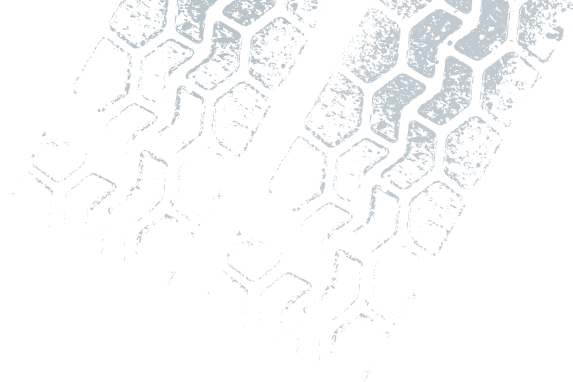

...RULE THE ROADS

Powerful driving and position lights in one stylish package. Roof or bumper-mounted, the distinctive HELLA VALUEFIT Blades are right there with you, leading the way, with road-going confidence and class.



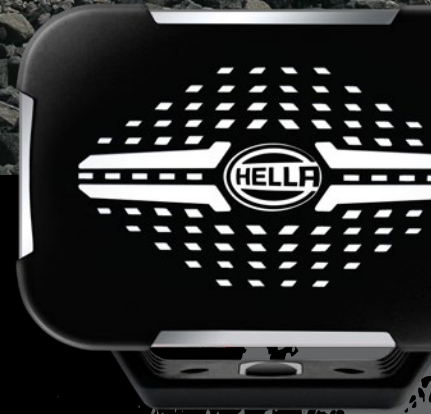


...OR RULE, OFF-ROAD!

Stand out as Leader of the Pack off-road, with attention grabbing amber position lighting, paired with the Blade driving light's unyielding power and performance.



STYLE... **MEETS SUBSTANCE**

HELLA VALUEFIT Blade driving lights feature high-quality, durable construction for long-lasting good looks and performance.

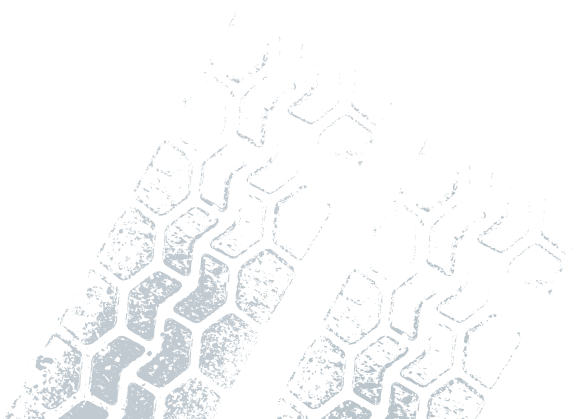


BLADE 7 INCH ROUND



Technical Data	
Rated voltage	Multi-voltage
Operating voltage	12-24V DC
Power consumption	36W
Light function	Auxiliary Driving Light and Position Light
Colour temperature	6,000 K
Material	Housing: Aluminium Bezel: Plastic (ABS) Lens: PC (Polycarbonate) Bracket: Plastic / glass fibre PA66 + GF
Rim colour	Chrome or Black
Weight	1,200g
Temperature range	-30°C to +60°C
Degree of protection	IP 69K, IP 67
Type approval	ECE R10 (EMC), R148, R149
Ref. no.	50
Mounting	Upright
Cable	500 mm cable with open ends
Application	Trucks, 4WD and SUV's, and off-road vehicles

Dimensions

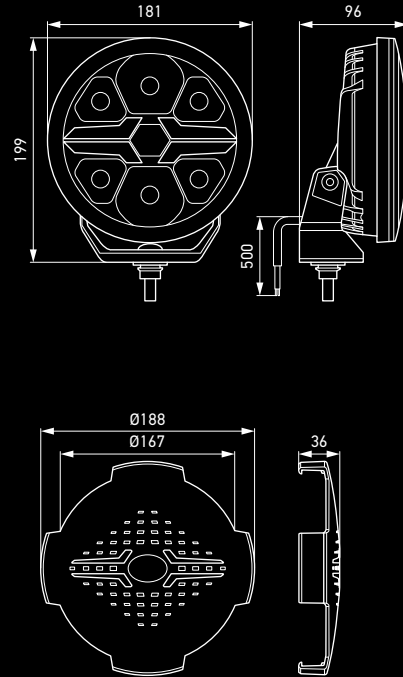

Round cover, 7 inch (8XS 358 198-001, optional accessories)

The AMBER position light does not have ECE approval: use is limited to off-road areas off public roads according to local regulations (see installation instructions).

RECOMMENDED MODES

ON ROAD



DRIVING LIGHT



POSITION LIGHT

OFF-ROAD ONLY



DRIVING LIGHT



POSITION LIGHT


Product Image	Variant	Description	Position Light Colour	Part Number
	HELLA VALUEFIT Chrome Blade 7 inch round	36W, ECE ref. 50	White or amber (connection optional)	1FJ 357 198-031
	HELLA VALUEFIT Black Blade 7 inch round	36W, ECE ref. 50	White or amber (connection optional)	1FJ 357 198-071



BLADE 9 INCH ROUND



Dimensions

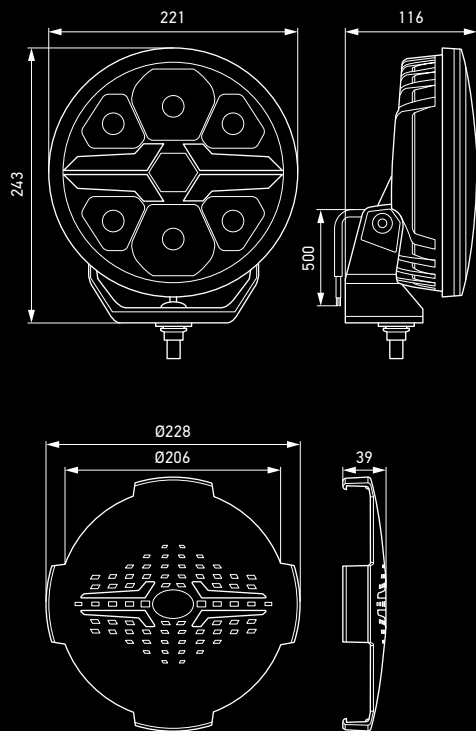

Round cover, 9 inch (8XS 358 198-011, optional accessories)


Technical Data

Rated voltage	Multi-voltage
Operating voltage	12–24V DC
Power consumption	18W
Light function	Auxiliary Driving Light and Position Light
Colour temperature	6,000 K
Material	Housing: Aluminium Bezel: Plastic (ABS) Lens: PC (Polycarbonate) Bracket: Plastic / glass fibre PA66 + GF
Rim colour	Chrome or Black
Weight	1,920g
Temperature range	30°C to +60°C
Degree of protection	IP 69K, IP 67
Type approval	ECE R10 (EMC), R148, R149
Ref. no.	50
Mounting	Upright
Cable	500 mm cable with open ends
Application	Trucks, 4WD and SUV's, and off-road vehicles


The AMBER position light does not have ECE approval: use is limited to off-road areas off public roads according to local regulations (see installation instructions).

RECOMMENDED MODES

ON ROAD

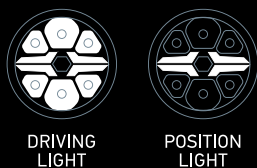

OFF-ROAD ONLY

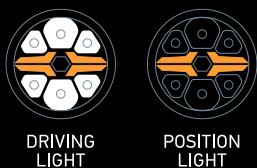

Product Image	Variant	Description	Position Light Colour	Part Number
	HELLA VALUEFIT Chrome Blade 9 inch round	18W, ECE ref. 50	White or amber (connection optional)	1FJ 357 199-031
	HELLA VALUEFIT Black Blade 9 inch round	18W, ECE ref. 50	White or amber (connection optional)	1FJ 357 199-071


BLADE 9 INCH RECTANGULAR



Technical Data	
Rated voltage	Multi-voltage
Operating voltage	12-24V DC
Power consumption	36W
Light function	Auxiliary Driving Light and Position Light
Colour temperature	6,000 K
Material	Housing: Aluminium Bezel: Plastic (ABS) Lens: PC (Polycarbonate) Bracket: Plastic / glass fibre PA66 + GF
Rim colour	Chrome
Weight	1,550g
Temperature range	-30°C to +60°C
Degree of protection	IP 69K, IP 67
Type approval	ECE R10 (EMC), R148, R149
Ref. no.	25
Mounting	Upright
Cable	500 mm cable with open ends
Application	Trucks, 4WD and SUV's, and off-road vehicles

The AMBER position light does not have ECE approval: use is limited to off-road areas off public roads according to local regulations (see installation instructions).


Dimensions

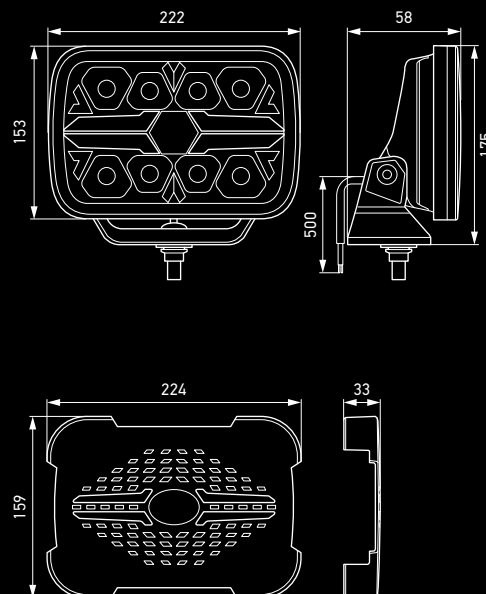

Rectangular cover, 9 inch (8XS 358 198-021, optional accessories)

RECOMMENDED MODES

ON ROAD



OFF-ROAD ONLY



Product Image	Variant	Description	Position Light Colour	Part Number
	HELLA VALUEFIT Chrome Blade 9 inch rectangular	36W, ECE ref. 25	White or amber (connection optional)	1FJ 357 199-081




STRIKING FEATURES

PROTECT YOUR SIGNATURE
STYLE ON OR OFF-ROAD



The optional Blade light cover accessories protect your lights from stones, bugs, and road tar while not in use. When operating, the signature white or amber Blade position light remains visible through the covers, even at long distance.


ACCESSORIES

Product Image	Description	Part Number
	Protective caps with HELLA logo and translucent position light feature HELLA VALUEFIT Blade 7 inch, round cover	8XS 358 198-001
	HELLA VALUEFIT Blade 9 inch, round cover	8XS 358 198-011
	HELLA VALUEFIT Blade 9 inch, rectangular cover	8XS 358 198-021


ILLUMINATION

The light distribution charts shown are for pairs.


HELLA VALUEFIT Blade 7 inch round
Reference number 50

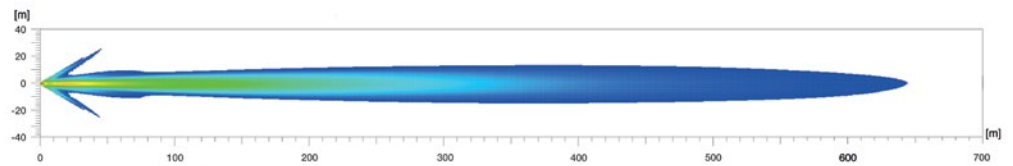

HELLA VALUEFIT Blade 9 inch round
Reference number 50

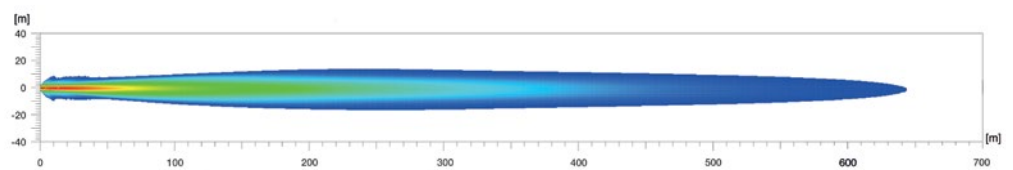

HELLA VALUEFIT Blade 9 inch rectangular
Reference number 25

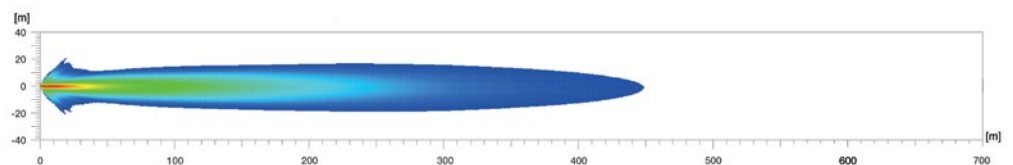

WARRANTY

ALL HELLA VALUEFIT Blade Driving Lights are backed by a 2 YEAR Manufacturer's Warranty in New Zealand and Australia.





HELLA-New Zealand Limited

81-83 Ben Lomond Crescent
Pakuranga, 2010
Auckland
New Zealand

Sales/Customer Service:

Tel: +64 9 577 0366

nzsales@hella.co.nz

www.hella.co.nz