

INSTRUCTION SHEET


for: **Part No. 980573xx LED Work Lamp**




Introduction

HELLA LED products offer many advantages over conventional bulb lamps. Significantly reduced power consumption, ultra long life and high tolerance to shock and vibration make LED lamps the ideal choice for the harsh automotive environment.

Light Source	LED
Light Output	~550 lumens
Colour Temperature	5000K
Operating Voltage	Multivolt™ 9-33V DC
Power Consumption	7W (0.6A@12V / 0.3@24V)
Degree of Protection	Overvoltage, reverse polarity and spike protected
	IP 67 - Completely sealed

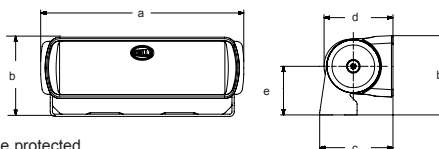

Housing Material	'Non-metal' thermally conductive housing
Lens Material	Heavy duty Grilamid®
Bracket Material	Bead blasted 316 stainless steel
Cable	Pre-wired with 2.5 m cable
Weight	320 g (including cable)
Manufacturing Location	New Zealand



Dimensions	
a = 136mm	/ 5.35"
b = 53.0mm	/ 2.08"
c = 49.0mm	/ 1.93"
d = 46.0mm	/ 1.81"
e = 32.5mm	/ 1.28"
f = 90.0mm	/ 3.54"
g = 123mm	/ 4.84"
h = 25.0mm	/ 0.98"

Electromagnetic Compatibility (EMC)

This LED lamp is an electronic device. The electrical circuits contain components that suppress possible interference, both emission as well as susceptibility, to the limits prescribed in international regulations

Protection against damage due to voltage spikes

This lamp is protected against overvoltage, positive spikes up to 500 volts, reverse polarity connection and negative voltage spikes of up to 1000 volts.

Wiring and dimming

LED modules are polarity conscious. Reverse polarity will not damage this product but will inhibit its function. HELLA recommends wire connections be soldered and heat shrink tubing applied to seal the joint.

To switch the lamp to high intensity mode both Red and Brown cables must be connected to power (+). If the lamp is required to switch between low and high intensity then a headlamp type switch (such as Hella P/N 4056) may be used. Use the switch for Low intensity (position lamp feed on switch) and High intensity (headlamp feed which includes position lamp). Lamp must be protected by a fuse rated at 5 amperes maximum.



Cable colour	Connect to	Power Consumption
White	Negative (-)	-
Red	Low Intensity (+)	1W
Red & Brown	High Intensity (+)	7W

Angle adjustment and care

The lamp is equipped with friction washers, which allow the lamp to remain in a fixed position, however it still may be easily adjusted by hand. The swivel resistance can be adjusted by gradually tightening or loosening the end cap screws located on each side. If the lamp is to stay in a fixed position in high shock/vibration areas it is recommended to fit the additional washers (included with lamp) for extra clamping force. The washers are fitted to the outer screw caps, in addition to the original washers fitted to the lamp. It is important that both friction mounts are adjusted to apply similar friction and that the screws are not over tightened (max 2.5 N·m).

This lamp features an advanced technology, thermally conductive but non-metallic housing. Whilst completely corrosion and weather proof, the surface can be prone to mechanical marking which in no way affects its thermal transfer function or durability against long term harsh UV exposure and chemicals.

FIT AND FORGET - BY DESIGN

Congratulations, the product you have selected comes from **HELLA** - a world leader in LED lighting design.

Following the launch of the first LED automotive signal lamps in 1990, **HELLA** Design and Innovation continues to set new standards. **HELLA** innovative solutions have been incorporated into millions of lamps, engineered and tested to the most stringent standards, to suit the most demanding environmental conditions.

The cornerstone to the success of our products is our no compromise **Fit and Forget - by Design** philosophy which is incorporated into every step of the product life cycle.

In a world consuming finite resources at an ever faster rate, **Fit and Forget - by Design** is the right environmental choice that also makes perfect economic sense to customers that consider the total life cycle Cost of Ownership.

For general comments about HELLA's products please contact us on E-mail at techfeedback@hella.co.nz

